

Energy Management Solutions  
Liquid Energy Specialists  
Europe



# TankMaster<sup>®</sup>

## One tank, multiple applications

Tank for transport\* and storage of liquid fertilizer, water and AdBlue<sup>®</sup>

Capacity: 6000 litres



Space for Smart Monitoring telemetry options installation




Forklift pockets



6 bottom fixing points for easy attachment of tank to a truck or trailer



Anti-splash guard around the lid




2" bottom outlet fitted with stainless steel ball valve




Handles for shackles




### TankMaster<sup>®</sup> tank advantages:




Robust construction




Unique shape for increased strength and rigidity of the tank




Small dead zone



Drain outlet for easy emptying the tank



Level markings



Stationary tank with the transport\* feature


### Explore product variants:



Product Code:  
1059664  
liquid fertilizer



Product Code:  
1059663  
liquid fertilizer  
and domestic water



Product Code:  
1059662  
AdBlue<sup>®</sup>



Product Code:  
1059661  
domestic water



\*Transport possible after adaptation with optional liquid wave protection.

# TankMaster® - makes your work easier

Example applications - with the TankMaster® you will achieve:



Rainwater catchment for reuse



Liquid fertilizer availability for work in the field



AdBlue® storage with the possibility of transport to the required delivery location



Use of stored water for livestock watering

## Adapt your TankMaster® tank for transport! Order dedicated liquid wave protection.




### Dimensions:

Capacity	Length	Width	Height
6000 litres	3270 mm	1900 mm	1475 mm

The dimensions given are approximate. The differences result from the production technology and method of use of the product.

### Equipment:

- › Single skin tank made of UV-stabilised polyethylene
- › 2" bottom outlet fitted with stainless steel ball valve
- › 16" access lid with anti-splash guard around the lid
- › Float vent protection integrated into the cover
- › 6 bottom fixing points

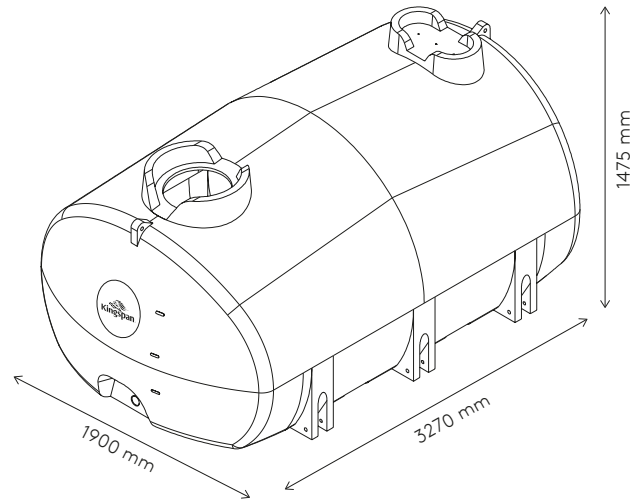

### Contact us for more information:

+48 61 814 44 00, [sales.rokietnica@kingspan.com](mailto:sales.rokietnica@kingspan.com)  
or visit us at: [kingspan.com](http://kingspan.com)



Download the leaflet in electronic version

We take every care to ensure that the information in this document is accurate at the point of publication. Specification may vary (within a small parameter) due to manufacturing process variations or environmental conditions. All images are for illustration purposes only and should not be taken as binding. The actual product may vary, and specification/dimensions/colour/other attributes may differ. To ensure you are viewing the most recent and accurate product information, please visit [kingspan.com](http://kingspan.com).

®Kingspan and the Lion Device are Registered Trademarks of the Kingspan Group plc in the UK, Ireland and other countries.  
All rights reserved.

Registered Office: 180 Gifford Road, Portadown, Co. Armagh, BT63 5LF. VAT GB412 5124 03. European Office: 5 Topolowa St., 62-090 Rokietnica, Poland. VAT PL779 20 57 260.